

Binary Acoustic Technology

Digital Acoustic Processing

www.binaryacoustictech.com

AT100 Ultrasonic Transmitter

Product description:

The AT100 is a small, portable, ultrasonic transmitter that is designed for field research. It employs a wide bandwidth ultrasonic element along with an efficient wideband amplifier to produce an impressive 100dB SPL transmit capability in a small, light-weight package.

The AT100 is designed to be operated by a Windows based lap-top computer. It connects a lap-top through a high speed USB 2.0 interface. The bundled playback software allows the user to select between prerecorded files and play them back through the AT100. The software supports the industry standard WAV file format and works with files generated by SPECT'R as well as time expanded detectors recorded by SonoBat (www.sonobat.com) or BatSound (www.batsound.com). Optionally, the AT100 can operated using a Binary Acoustic Technology FG125 field generator which provides a stand-alone or unattended transmit capability.

The AT100 requires less than 2.5 Watts of operating power. It can either be powered by the lap-top over the USB cable or it can be powered from an external 9 to 12V source.

Specifications:

Frequency Range : 10 to 120 KHz (see graph)

Maximum Transmit Power : 100 dB SPL @ 50KHz


Dynamic Range : > 70 dB

Interface: USB 2.0 (High-Speed)

Power Requirements : < 2.5 Watts

Contact information:

Information : info@binaryacoustictech.com
Sales: sales@binaryacoustictech.com

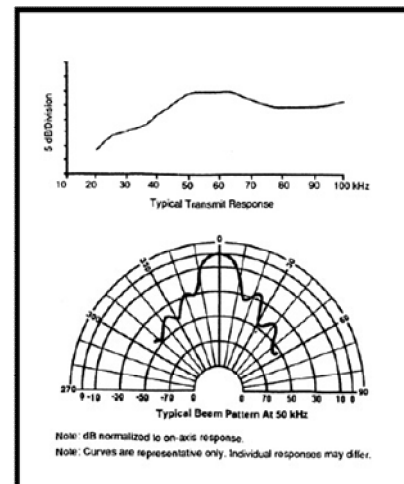

Frequency Response
and
Beam Pattern